

Features

Ergonomic Enclosure

The steel enclosure is designed with small footprint to save valuable real estate; can be customized with the bank's corporate color for image branding.

Secured

- Superior locking system for added security and also to comply with banking requirements for cheques transaction.
- Can be bolted to the ground.
- Can incorporated UL291 equivalent or fire resistant safe. *

Double Document Detection

Prevents double cheques insertion and avoids document jam. This provides error-free back office processing by eliminating balancing problem.

Crisp Image Capture

Crisp and clear image capture on receipt for customer verification. Supports up to 256 grey levels.

Sharp & Clear Back Impact Printing

Facilitate back office processing including cheques power encoding.

Sabotage Prevention

Real self-service machine that can prevent sabotage by not accepting any documents at point of entry other than real cheque.



ScanCek® Cheque Deposit Kiosk

integrated cheque scanning & deposit solution

As the banking industry drives toward becoming more customer centric, offering conveniences to your valued customers to perform banking transactions anytime and anywhere is no longer an exception but a norm. Banks are forever on a lookout for ways and means to elevate the service level provided to their customers. As the business adage goes, "if you don't take care of your customers, someone else will". ScanCek®, an innovative self service kiosk provides customers with the ability to deposit cheques anytime of the day, is a very important customer based self service kiosk. It allows the user to direct feed the cheques without the need for bank-in slip or envelop. The kiosk acknowledges by printing a receipt that can contain the image of the cheque. ScanCek® scans the deposited cheques and reads the MICR data. These images and data can be used to facilitate backend outward cheque clearing process.

Benefits

Cost Saving

Requires no deposit slip and envelop. Reduce the over-the-counter manpower requirements whilst enhancing productivity of employees to other focus areas.

Improves Customer Service

Provides convenience banking services to valued customers—anytime banking.

Process Automation

Facilitate automation of backend outward cheque clearing process. Prints receipts with cheque images and transaction details at the end of each transaction.


Perspective



Front

Side

Functional Block Diagram

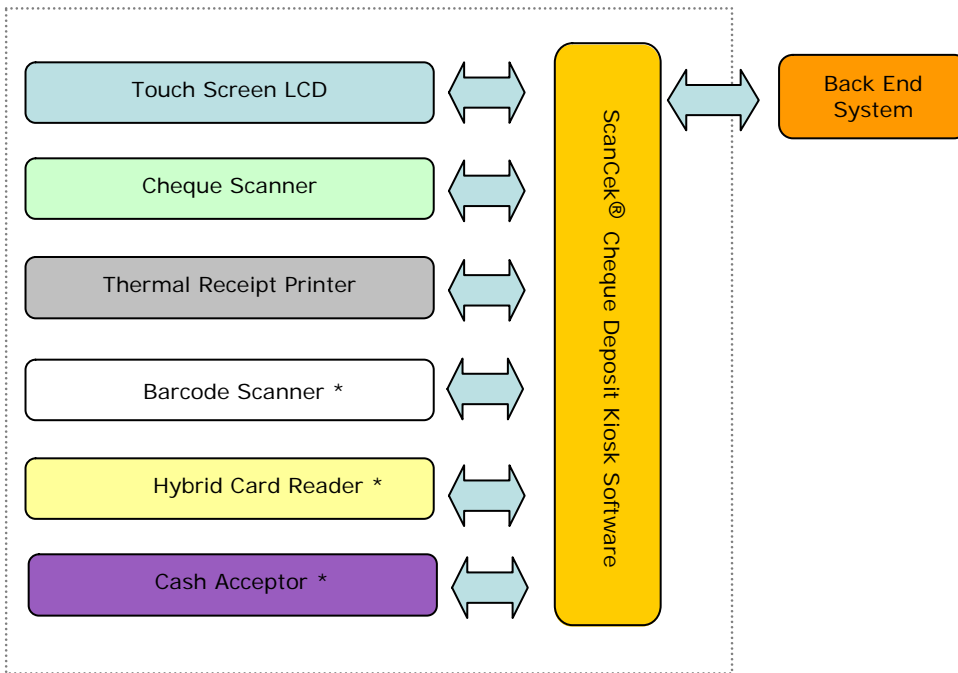

For more details, please contact:

* Optional Item

* The above modules are not part of the standard ScanCek® Cheque Deposit Kiosk. Quoted separately when requested.

Call us for the latest

ScanCek® is registered trademarks of KL Security Systems Sdn Bhd

Industrial Computer

- Secured Industrial PC base unit with standard configuration
- ScanCek® Kiosk Software & User Interface
- Web Camera *

Industrial Touchscreen Flat Panel Display

- NEC 8.4" TFT LCD
- 800 x 600 resolution and analog VGA input
- Touch Screen

Customer Keypad *

- Stainless steel with 12 numeric + 4 function keys
- Data Encryption (Triple DES Standard)

Image Scanner

- MICR Reader: CMC 7, CMC 0, E13B
- Image Capture: 200 dpi, 256 GrayScale
- Back Validation (HP InkJet Printer)
- Double Document Detector

Motorized Hybrid Reader *

- Read Magnetic Strip & Smart Card (ISO 7816 Compliant)
- Standard Shutter + EMV/2

Thermal Receipt Printer

- Graphic Capability
- Paper Feeding Speed: 220 mm per seconds with 80mm paper width
- Paper roll size: 160mm

Switching Power Supply

- 220-240 volts/ 50/60 Hz app. 400W

Steel Enclosure

- 1.5mm thickness
- Oven baked epoxy paint
- Standard Industrial Locks
- 1 x Collection Bin
- Bottom Cabinet with 1 outer door (scanner assembly & cheque collection)
- Top enclosure with hydraulic opening

Document Dimension

- Height : 60 - 110 mm
- Length : 127 - 210 mm
- Weight : 0.07 - 0.15 mm
- Paper Thickness : 60 - 120 g/sqmt

Kiosk Dimension (approximately)

- Width : 420 mm
- Height : 1130 mm
- Depth : 700 mm
- Weight : 80 kgs

Operation Condition

- Temperature : 10°C — 40°C
- Humidity : 30% to 70%

Note: We reserve the right to change the above specifications without any obligation. Please refer to our latest information.